

GIANTMIX FR STATIONARY

FR3 110-400

FR4 150-400

FR5 185-400



Application

Long-axis agitator for stationary installation
Dry matter content up to 14 %
Substrate temperature up to 70°C
pH-value 6.5 - 8.2

Technical Data

Tube length 2.5 / 3.0 m
Tube Ø 101.6 x 4.0 or 5.7 mm in ss304
Sound pressure level 75 dB(A)
Installation up to 8 m below substrate level possible,
deeper immersion depths on request
Oil inspection glass for monitoring the tightness
Option: Rubber compression seal Ø 200 mm, galvanized
Optional PTO with protection unit for an alternative tractor
operation
Agitator completely in modular design
POM protection to minimize abrasion

Motor

11.0 / 15.0 / 18.5 kW : 4 poles
400 V, 50 Hz, special tensions on request
PTC thermistors as overheat protection
Ex-Motor (Series)  II 3G Ex nA II T3 Gc
Special version with 13.5 kW  II 2G Ex eb IIC T3 Gb
Optional: rain protection hood (ss304)

Gear

Spur gear drive, helical teeth, low noise level
Reduction ratio $i = 3.69$
Oil chamber, gear oil SAE85W-140 / API GL-5
Oil change interval after 2,000 operating hours

Bearing

2 tapered roller bearings to absorb the axial forces
Mechanical seals in SiC/SiC, independant of rotation
direction
Interim bearings for the drive shaft, slide bearing

Propeller

3-blade high efficiency propeller,
dynamically balanced

FR3:	11.0 kW	400 rpm	propeller HD+ 580
FR4:	15.0 kW	400 rpm	propeller HD+ 620
FR5:	18.5 kW	400 rpm	propeller HD+ 660

in ss304, ss316 or hardened steel

Ex-Zone

Ex-Zone 2 (outside the tank) and Zone 1 (inside the tank)
Special version FR4 with 13.5 kW for Zone 1
(outside tank)
Classification mechanical components:
  II 2G Ex h IIA T3 Gb

Control box (optional)



Star-delta-switch, soft starter, frequency converter
Delivery without connecting cable

GIANTMIX FR STATIONARY

FR3 110-400

FR4 150-400

FR5 185-400

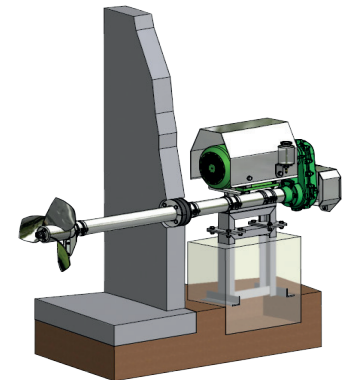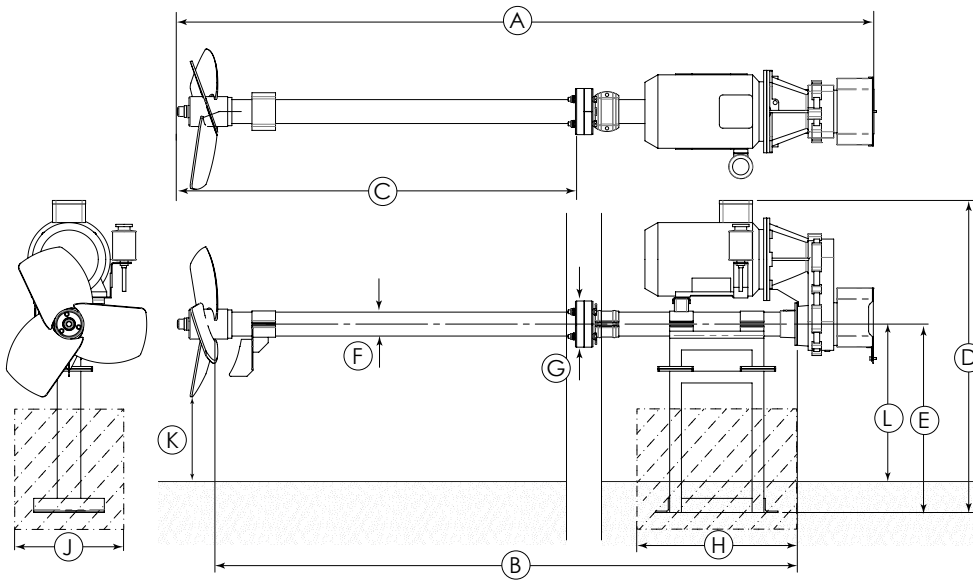

Dimensions

Type	A [m]	B [m]	C [m]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	J [mm]	K [mm]	L [mm]
FR 3-5	3 / 3.5	2.5 / 3	1.6 / 2.1	1,325	800	101.6	200	800	500	min. 300	700

Technical data

Type	Rated Power [kW]	Propeller speed [rpm]	Rated Voltage [V]	Rated current [A]	Frequency [Hz]	Power factor cos ϕ	Gear reduction ratio	Propeller diameter [mm]	Axial force [kN]	Flow velocity [m/s] *	Pumping rate Water [m ³ /min]	Weight approximate [kg]
FR3	11.0	400	400	19.6	50	0.88	3.69	580	2.2	3.4	52	300
FR4	15.0	400	400	28.3	50	0.83	3.69	620	2.6	3.9	68	300
FR5	18.5	400	400	33.7	50	0.85	3.69	660	3.9	3.25	84	300

Subject to technical changes

* measured in water and 1.2 m distance